




Indoor Fixed Series LED display

MP LED brings you stable and satisfied indoor LED Displays.

Shenzhen MP LED Technology CO., LTD

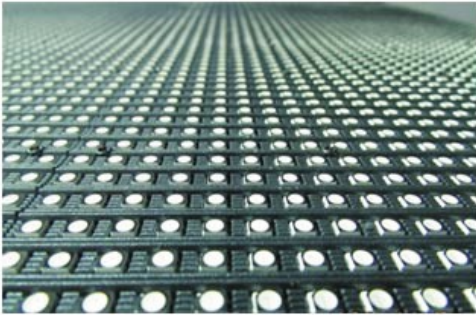


Indoor led panel

Huge Viewing Angle And Outstanding Uniformity of Leds

MILED indoor fix series led display adopt advanced encapsulation and SMT technology to ensure perfect uniformity and flatness of LEDs. The image also complete and no dirty spot when you stand at 140° vertical.

Magnetic Module Solution Available

The Front-access magnetic module available for some special applications which don't have enough maintain space, improving maintenance speed rapidly.

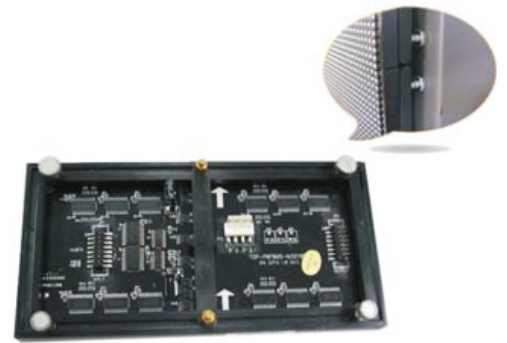

Black led lamp


Black led lamp available

Indoor UHD series P1.5, P1.6, P1.9, P2.5, P3, P4 etc adopt complete black led lamp to well improve the contrast of image and much more prolong the lifespan of led chip for small pixel pitch with such a higher density of leds

Three-High Design and Excellent Visual Effect

The advanced configuration ensures its high contrast ratio, high refresh rate and high grey level, which delivery a exquisite image.



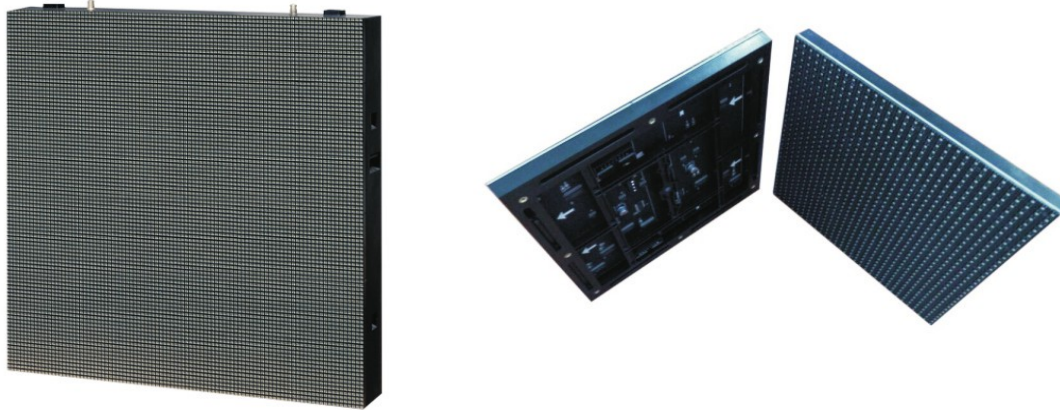

Item	Indoor Fixed Series				
Pixel Pitch (mm)	4mm	5mm	6mm	7.62mm	10mm
Pixel density (dots/m) ²	62500	40000	27777	17222	10000
LED Type	SMD2121	SMD3528	SMD3528	SMD3528	SMD3528
Viewing angle	H:140°,V:140°	H:140°,V:140°	H:140°,V:140°	H:140°,V:140°	H:140°,V:140°
Brightness (CD/m ²)	≥1400	≥1200	≥1200	≥1200	≥1200
Drive Method	1/16	1/16	1/16	1/8	1/4
Color Depth (bits)	≥14bits	≥14bits	≥14bits	≥14bits	≥14bits
Refresh Rate (Hz)	≥1920	≥1920	≥1920	≥1920	≥1920
Module Size (mm)	256x128	320x160	192x192	244x244	320x160
Cabinet Size (mm)	512x512x120	960x960x120	960x960x120	960x960x120	960x960x120
Cabinet Material	Steel	Steel	Steel	Steel	Steel
Cabinet weight (kg/m) ²	45	45	45	45	45
Voltage Input	110V~220V±10%	110V~220V±10%	110V~220V±10%	110V~220V±10%	110V~220V±10%
Aver.power (W / m) ²	330	210	150	240	120
Max.power (W / m) ²	1100	700	500	800	400
IP Grade	IP 30	IP 30	IP 30	IP 30	IP 30
Operating temperature/humidity	temperature:-20℃~ 50℃ humidity:10~90%RH				
Storage temperature/humidity	temperature: -40℃~ 60℃ humidity:10~90%RH				
Lifetime(h)	≥100000				
Compliant Standard	CCC、CE、Rosh				

APPLICATION

- Thinner and light weight than traditional fixed installation cabinet.
- High contrast ratio with black SMD, especially for indoor P3 and P4.
- Budget friendly-- Low investment, high return.
- Indoor TV Studio, Church, Concert, Stage, Fashion show, Commercial promotion, Theme park, Shopping mall, Hotel, Airport Railway station, Bus station, etc.